





Wiring Diagram

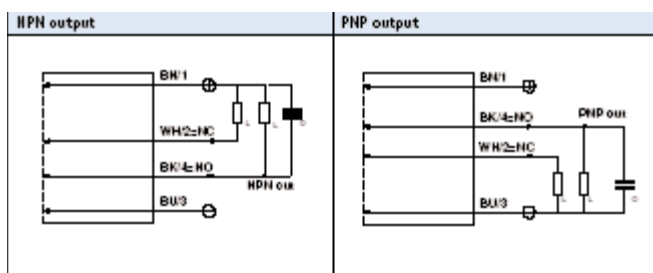

K1 Connection Diagram



TECHNICAL SPECIFICATIONS

Nominal Sensing Distance $S_n$	5 mm	8 mm
Operating Distance	-	-
Differential Travel	10% Typ	10% Typ
Repeat Accuracy R	5%	5%
Operating Voltage $U_b$	5-40VDC	5-40VDC
Ripple $U_{pp}$	<10% $U_b$	<10% $U_b$
No-load Supply	18mA	18mA
Load Current $I_a$	<400mA	<400mA
Leakage Current	<10uA	<10uA
Voltage Drop $U_a$	1.2V max.	1.2V max.
Output Type	PNP or NPN NO & NC	PNP or NPN NO & NC
Switching Frequency	1KHz	1KHz
Time Delay Before Availability $t_v$	100ms	100ms
Supply Electrical Protections	polarity reversal, transient	polarity reversal, transient
Output Electrical Protections	short circuit protection (autoreset)	short circuit protection (autoreset)
Ambient Temperature $T_a$	-25--+75C	-25--+75C
Temperature Drift	+/- 10% SR	+/- 10% SR
Protection Degree (DIN 40 050)	IEC IP68	IEC IP68
LED Indicators	Yellow (NO output energized)	Yellow (NO output energized)
Housing Material	NBT	NBT
Sensing Face Material	PBT	PBT
Tightening Torque	30Nm	30Nm
Weight (approximate)	70g (K1)	70g (K1)